


## Supracell V Mini-pleat

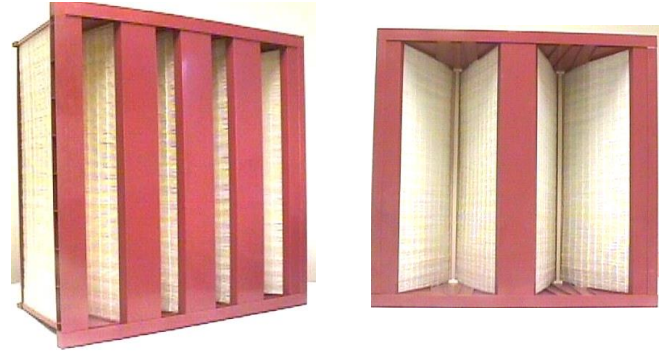

65% MERV 11, 85% MERV 13,  
 95% MERV 15, & 95% DOP

Resistance to Air Flow				Recommended Final w.g.		
ASHRAE Efficiency	CFM - Resistance			Final	Temperature Range	Average Burst Pressure
	2000	2500	3000			
65%	.24	.37	.52	2.0	0-150	8.0 w.g.
85%	.28	.44	.60	2.0	0-150	8.0 w.g.
95%	.36	.50	.64	2.0	0-150	8.0 w.g.
95% DOP	.76	1.00	N/A	2.0	0-150	8.0 w.g.

## Supracell V Mini-Pleat GT

